
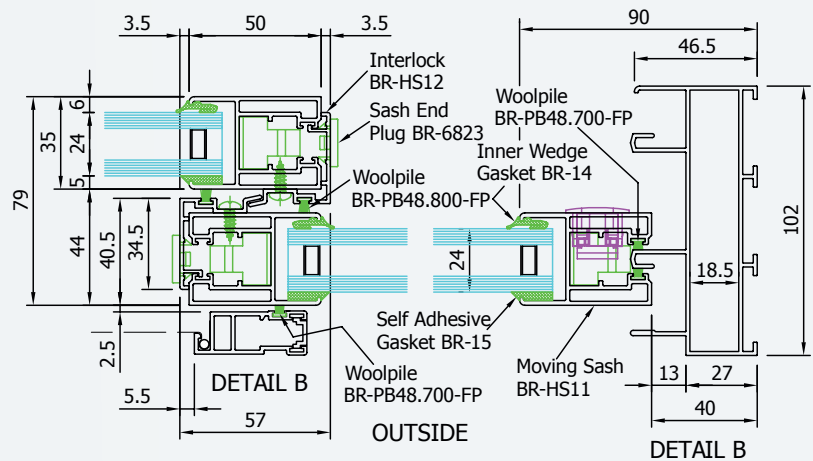


NTB-102-SLIDE

Slide horizontal sliding window system (non-thermally broken)

The system is designed to accommodate 24mm double glazed units or 6mm single glazing using non-beaded sash. As with all Brital systems, the horizontal sliding window system is manufactured to exacting standards, enabling economy to be combined with strength to give many years of aesthetic, troublefree operation.

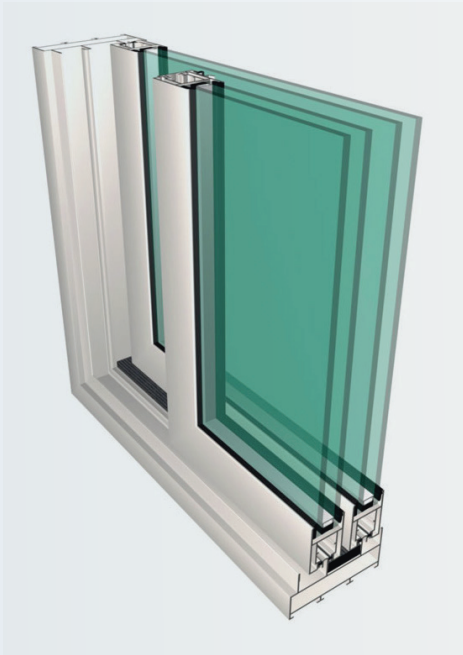

NTB-102-SLIDE

System Performance



SIZE

- Maximum sash weight 40 Kg with Corner/Roller Kit BR-0302.1 & BR-0302.2



DESIGN

- A non-thermal break system for use where economic construction is the primary requirement.
- Corners formed as 45 degree mitres to provide a quality
- All frame joints are fully sealed during manufacture.
- Neat pencil rounded section edges to glazing beads and frames to provide a softer, higher quality appearance.



PERFORMANCE

- Designed to perform at wind resistances up to 1.5 kPa.
- Opening panels fully weather-sealed with EPD gaskets.



INSTALLATION

- Accommodates various thicknesses of single and double glazed units.

DISCOVER
MORE ON OUR
WEBSITE

