
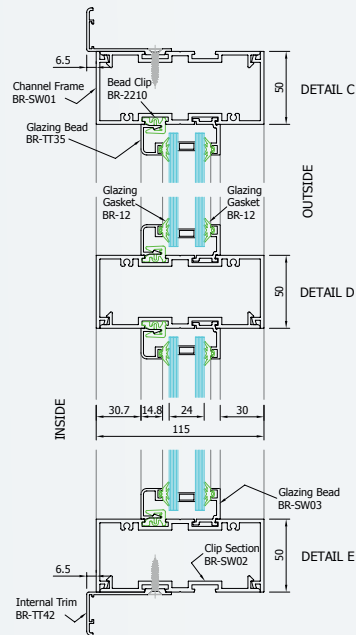


# NTB-55-SWDR

## Swing Door System (Non-Thermally Broken)

The system is glazed internally to accommodate a range of double glazed units, using standard beads. As with all Brital systems, the door system is manufactured to exacting standards enabling economy to be combined with strength to give many years of aesthetic, troublefree operation.

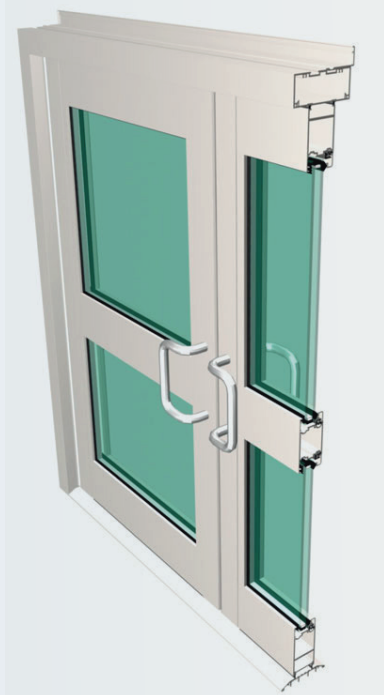

### NTB-55-SWDR

#### System Performance



SIZE

- Door shutter weights  
Medium Duty Door with BR-8020 Hinge: 150 kg (max)
- Bacony Door  
with two BR-9211.6 hinges : 80kg (max)  
with three BR-9211.6 hinges: 90kg (max)  
with two BR-8041.1 hinges: 90kg (max)



DESIGN

- All frame joints are fully sealed during manufacture.
- Robust design ensures they are suitable for high traffic applications such as main entrance doors
- Opening panels fully weather-sealed with woolpile seals.



PERFORMANCE

- The system offers high quality thermally broken sections to suit specific project requirements and reduce heat gain.
- Thermal performance can achieve  $U_w$  of 1.6 W/m<sup>2</sup>K.



INSTALLATION

- Windows are hung on heavy duty fixed hinges with concealed multi-locking system for effective weather resistance and security.

DISCOVER  
MORE ON OUR  
WEBSITE

