
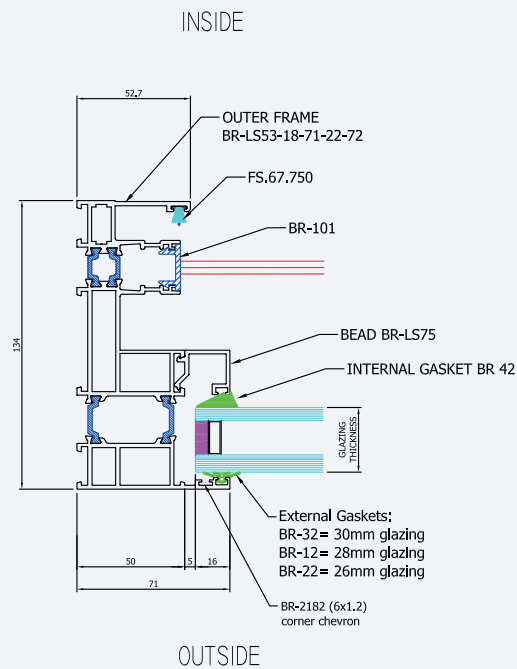


TB-HP-45G

Sliding Door System Fixed/Sliding & Sliding/Sliding Doors

The system is designed to accommodate up to 30mm thick insulated glass units. The sliding panels are designed to be wrap-around glazed and the fixed frames are bead glazed directly into the outer frame. As with all Brital systems the sliding doors are manufactured to exacting standards enabling economy to be combined with strength to give many years for aesthetic, troublefree operation.

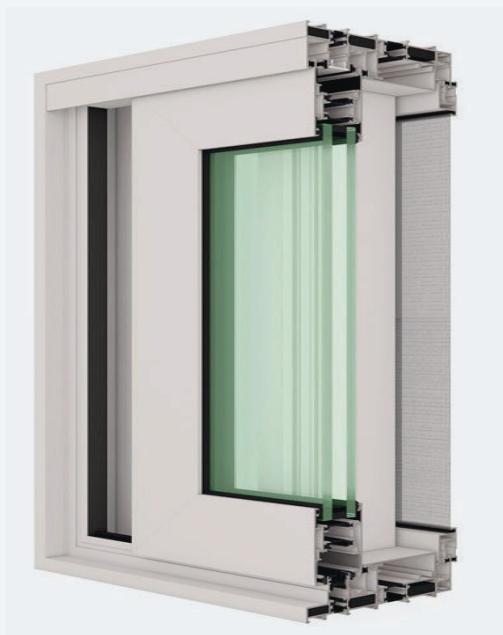

TB-HP-45G

System Performance



SIZE

- Corners formed as 45 degree mitres to provide a quality appearance, high performance and weather resistance



DESIGN

- Economy is combined with strength to provide many years of trouble free operation and to be aesthetically pleasing.
- Designed to perform at wind resistances up to 1.5 kPa.



PERFORMANCE

- A non-thermal break system for use where high quality but economic construction is required.
- Opening panels fully weather-sealed with EPDM gaskets.



INSTALLATION

- Sliding panels run on stainless steel tracks for smooth operation and long service life.
- Thermal Break frameless outward opening vent panels can be incorporated.
- Neat fully sealed weather seal joints.

DISCOVER
MORE ON OUR
WEBSITE

